

saving water

INDOORS

Florida's Water

It's Worth Saving

Use what you need, need what you use



RESOURCES


saving water resources

Saving Florida's water resources is a vital responsibility that will take everyone's participation to be successful. Water conservation may seem unnecessary in a state surrounded by water, but not all of that water is available for drinking or irrigation.

Though Florida usually receives about 50 inches of rain each year, only about 13 inches of water seeps into the ground to replenish underground aquifers. Aquifers are where more than 90 percent of us in northeast and east-central Florida get our drinking water.

It's easy to see that water conservation is necessary when considering that each average adult needs only 2.5 quarts of water each day to maintain a healthy body, yet each person in Florida uses about 120 to 150 gallons of water per day.

One of the most important ways to help meet our water supply needs for today and in the future is through conservation, which is the efficient and effective use of water.

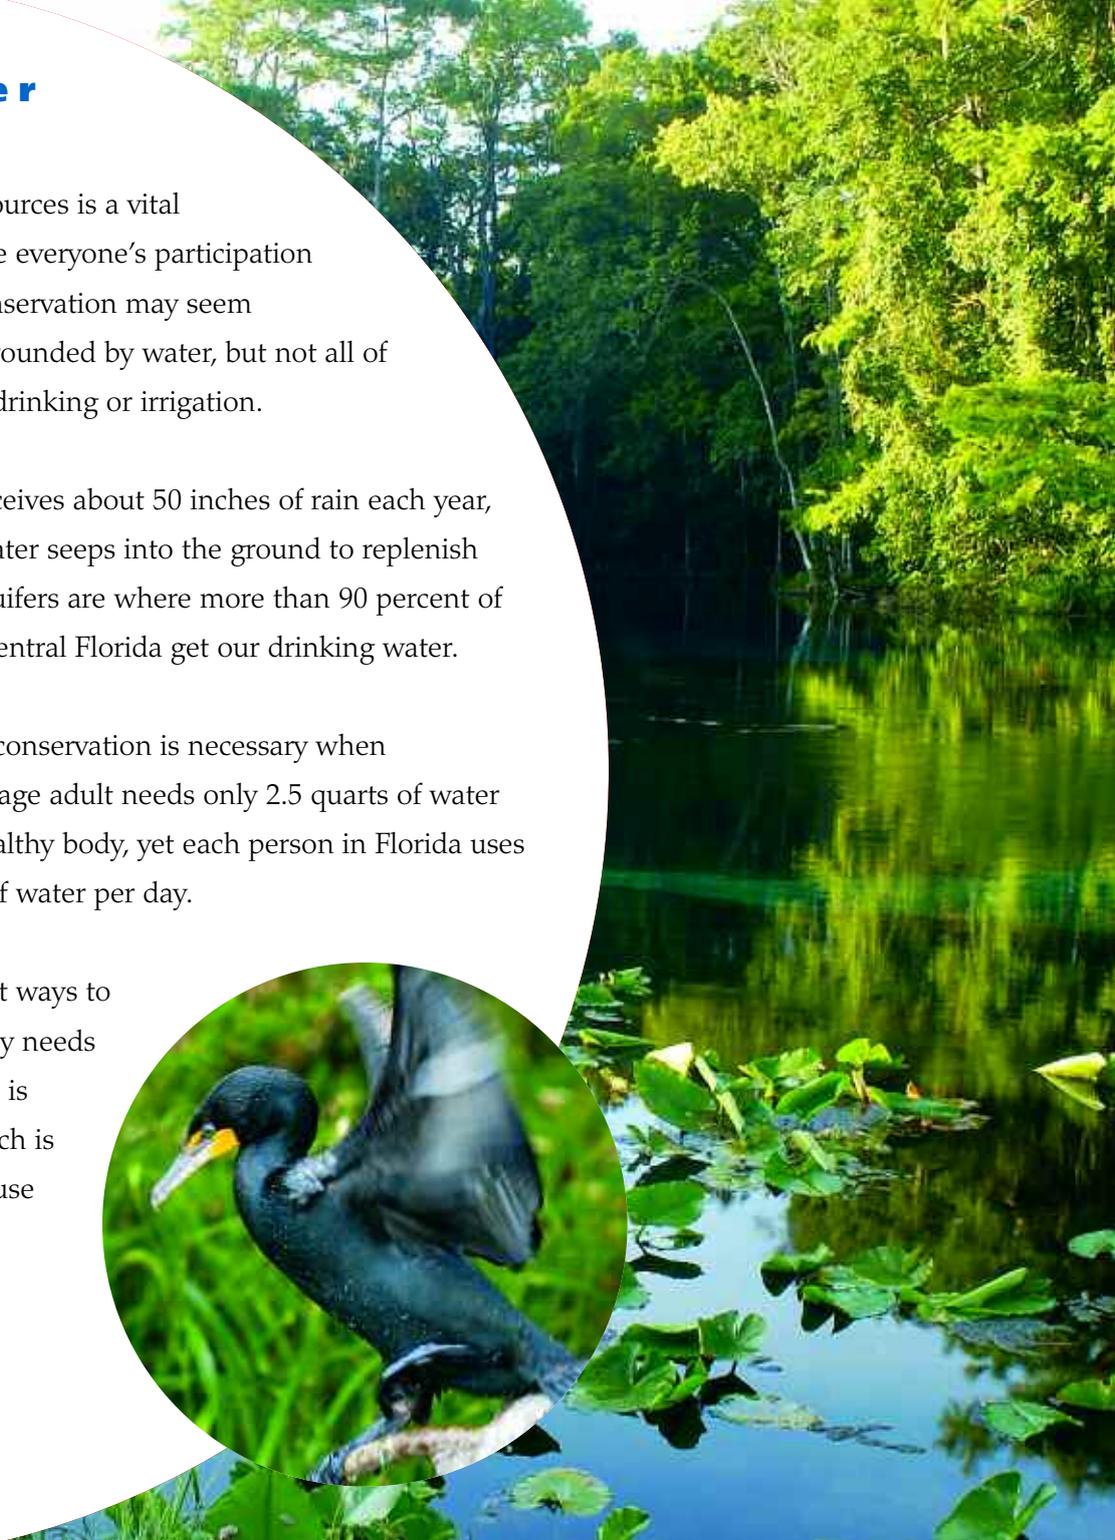

INDOORS

saving water indoors

Saving water inside the home is simple. Following are a few easy water conservation tips. Fixing leaks and replacing old water-guzzling plumbing fixtures with water-saving ones could save a family of four 30,000 gallons of water each year.

Here are some ways to save water inside your home.

First

Find out if you have a leak in your home by reading your water meter before and after a two-hour period when no water is being used. (Remember to wait for the hot water heater and ice-cube makers to refill, and for regeneration of water softeners.) If the readings are different after the two-hour period, you have a leak. If you have a well, listen for the pump to kick on and off while the water is not in use. If it does, you have a leak.



BATHROOM

toilets

Low-volume toilets

Since the mid-1990s, all new toilets have been redesigned to conserve water, using 1.6 gallons of water per flush. Older models use 3 gallons or more per flush.

If your toilet is not a newer water-saving fixture, you might want to consider purchasing a newer model.

Leaks

Leaks are often silent, allowing loss of water to go undetected for long periods of time. Some toilets may produce a running water sound that is easy to hear. Some leaks are visible as a small trickle running from the rim to the water in the bowl. The average leaky toilet can waste about 200 gallons of water per day.

To detect silent leaks, remove the lid from the toilet tank, remove any colored cleaning agents, flush to clear water in the bowl, then add dye tablets, leak detector fluid or a few drops of food coloring to the tank. If the tank is leaking, color will appear in the bowl within 30 minutes. Flush as soon as the test is complete.



toilets

Fixing leaks

To fix a leak yourself, you need a large adjustable wrench and a screwdriver.

Now follow these simple steps:

- Jiggle the handle. If that makes the toilet stop running, the chain or guide wire attached to the handle may have been out of alignment.
- If the toilet flush handle frequently sticks in the flush position, letting water run constantly, replace or adjust it.
- Make sure the handle fits snugly against the tank. If it doesn't, use the adjustable wrench to tighten the nut attached to the handle on the inside of the tank.
- Check the rubber flapper or flush valve at the bottom of the tank. It may not be resealing tightly after flushing. If it is worn or corroded, it needs to be cleaned or replaced. Replacement kits with easy-to-follow instructions are available at most hardware and home stores.

- Check the tank water level. The correct water level is about one-half inch below the top of the overflow tube in the middle of the tank. The overflow tube drains directly into your sewer system. To lower the water level, use the screwdriver to adjust the screw on the end of the ballcock float arm or bend the float arm down until the correct water level is achieved.
- If the water won't shut off at all, replace both the flapper and the ballcock.
- If these simple procedures don't stop the leak, you should call your plumber.



BATHROOM

baths and showers

Low-volume showerheads


By timing your shower to less than five minutes and installing low-flow showerheads, you can save water.

The older the showerhead, the more water it uses. New showerheads deliver 2.5 gallons of water per minute. Older fixtures can deliver as high as 8 gallons per minute. Pressures have been adjusted to the low-flow fixtures to deliver as good a shower as the higher flow showerheads.

Check your showerhead. If it is leaking or the flow rate is more than 3 gallons per minute, you should replace it with a low-flow version (2.5 gallons per minute maximum). To fix a leaky showerhead or to install a new showerhead, you need an adjustable wrench or pliers and joint sealer or tape.

Now follow these steps:

- Use the adjustable wrench to remove the old showerhead.
- Clean the threads to remove old joint sealer.
- Apply joint sealer or tape, using package instructions.
- Use the adjustable wrench to install the showerhead.
(Use a cloth between the showerhead and the jaws of the wrench to avoid scratching your fixture.)
- Turn the water supply on and test the showerhead.

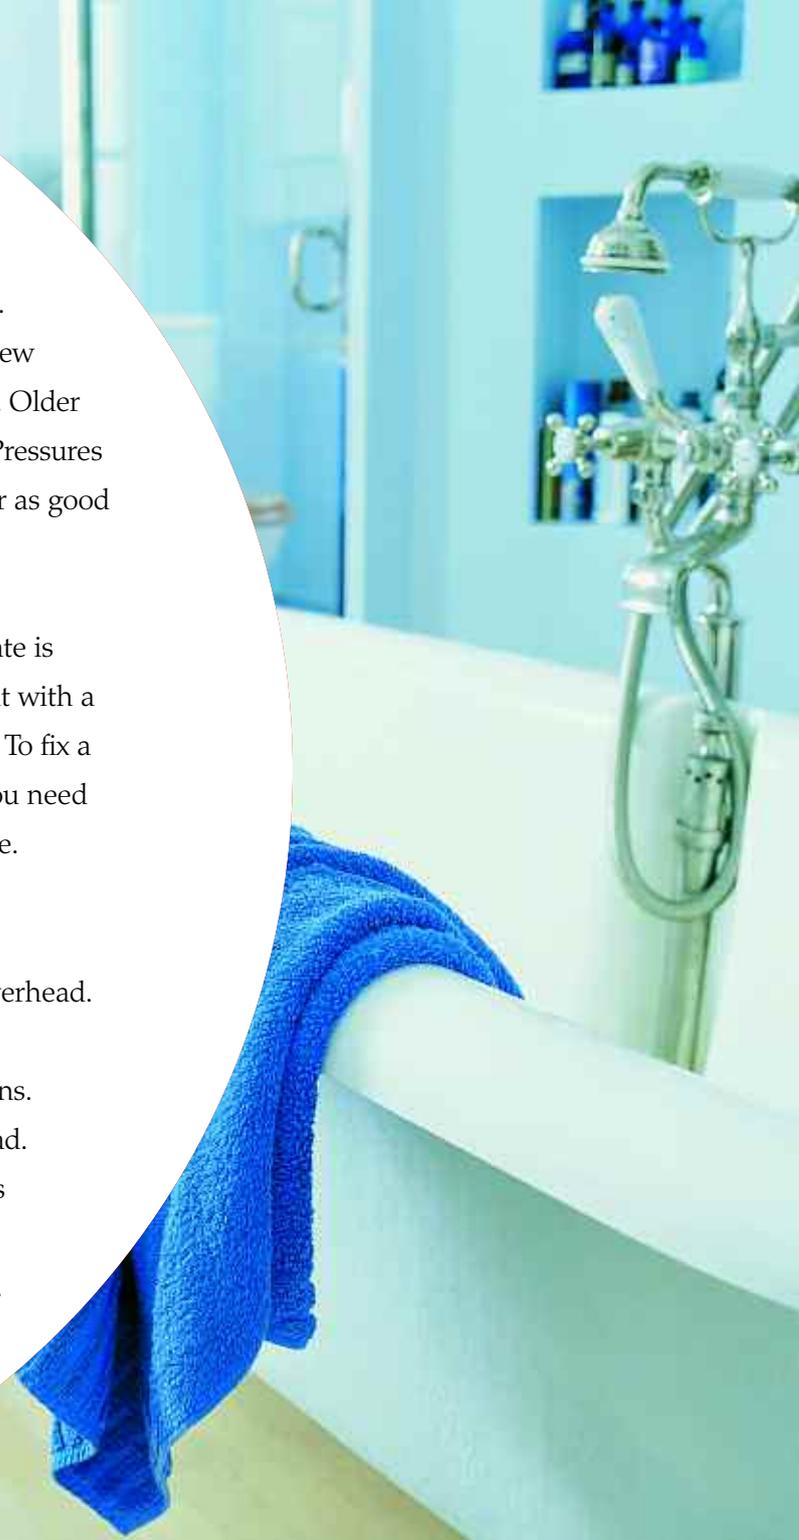

BATHROOM

baths and showers

Baths and other bathroom tips

Use the minimum amount of water needed for a bath by closing the drain first and filling the tub only one-third full. The initial burst of cold water will be warmed by the hot water as the tub fills.

In the shower, turn water on to get wet, turn off to lather up, then turn back on to rinse off.

When adjusting water temperatures, instead of turning the water flow up, try turning it down to balance the temperature.

Turn off the water as you brush your teeth, wash your face or shave.

Avoid flushing the toilet unnecessarily.

Dispose of tissues, insects and other such waste in a trash can rather than in the toilet.



FAUCETS

kitchen and bath

Leaks

Water losses caused by dripping faucets can range from several gallons to hundreds of gallons of water per day. Faucets left in the open running position waste from several hundred to several thousand gallons of water per day. Check faucets regularly for leaks at the faucet head and seepage at the base and its connections.

Repair leaky faucets

Leaky faucets are repaired by replacing washers and by tightening or repacking the faucet stem. Do-it-yourselfers can find a variety of repair kits in local plumbing supply stores, home improvement/hardware stores and discount stores. Most kits contain detailed instructions and a listing of necessary tools. If preferred, a plumber can make repairs.

Low-flow faucets

Check the amount of water flowing from each faucet. You can do this by opening the faucet and allowing the water to flow into a container for 10 seconds. Multiply the amount of water in the container by six to determine the per minute flow. If your existing faucet flows above 2.5 gallons per minute, install a low-flow aerator. For a bathroom faucet, a 1.5 gallons per minute flow will provide enough water for personal hygiene needs. For a kitchen faucet, you will want 1.5 to 2.5 gallons per minute of flow to make sure the flow of water is enough to wash and rinse dishes. You may want to use a low-flow aerator with an on/off flip handle that allows you to increase or reduce the flow as needed.

Aerators

Faucet aerators are circular screened disks, usually made of metal, that are screwed onto the head of the faucet to reduce flow. Aerators for kitchen faucets are available with a variety of spray patterns and flow-control features. Faucet aerators require periodic cleaning of grit and scale buildup that may inhibit flow.



LAUNDRY

Laundry

Several conservation practices can reduce the amount of water used when washing clothes.

- For washers with variable settings for water volume, select the minimum amount required per load.
- If load size cannot be set, operate the washer with full loads only.
- Use the shortest wash cycle for lightly soiled loads. Normal and permanent press wash cycles use more water.
- Check hoses regularly for leaks.
- Pretreat stains to avoid rewashing.

When you replace your clothes washer, consider a water-efficient model that uses an average of 27 gallons of water per load. Front loaders use 20–25 gallons.

Older and non-water efficient washing machines can use as much as 56 gallons of water per load.



TIPS

additional tips

Operate the dishwasher only when you have a full load. When purchasing a dishwasher, consider a water-efficient model.

When washing dishes by hand, fill one sink or basin with soapy water and fill the rinsing sink to one-third or one-half full. Avoid letting the water run continuously in the rinsing sink.

Kitchen sink disposals require a lot of water to operate properly. Start a compost pile as an alternative method of disposing of food waste instead of using a garbage disposal.

Do not use running water to thaw meat or other frozen foods. Defrost food overnight in the refrigerator or by using the defrost setting on your microwave.

Install instant water heaters in bathrooms and in the kitchen so you don't have to let the water run while it heats up.

Insulate your water pipes. You'll get hot water faster plus avoid wasting water while it heats up.

Avoid installing a water-to-air heat pump or air-conditioning system. Newer air-to-air models are just as efficient and do not waste water.

Install water-softening systems only when necessary. Save water and salt by only running the minimum amount of regenerations necessary to maintain water softness. Turn softeners off while on vacation.

Never put water down the drain when there may be another use for it such as watering a plant or cleaning.

Store drinking water in the refrigerator instead of letting the tap run while you wait for cool water to flow.



St. Johns River
Water Management District

St. Johns River Water Management District
Office of Communications and Governmental Affairs
4049 Reid Street • P.O. Box 1429 • Palatka, FL 32178-1429
(386) 329-4540 • (800) 451-7106

Visit us on the Internet at www.sjrwmd.com.
This publication is free.

© 2005 St. Johns River Water Management District.



Printed on recycled content paper.